

# Bore Cleaning: Pro-Shot Tactical Pull Through Cleaning System Instructions

Prior to cleaning, make sure firearm is unloaded.

Select appropriate size Tactical Jag, Tactical Brush, and Cleaning patches.  
\*For Selection Size Chart, See Bottom Right



6. Remove bore brush from pull through cable and unsecure handle, attach tactical pull through jag onto pull through cable with cleaning patch attached. Pull handle until tactical jag clears the barrel.




7. Repeat Steps 1-6 as necessary until clean.

\*For Maximum Results with Pro-Shot Tactical Jags, a new cleaning patch should be used each pass through the barrel.  
\*When using Pro-Shot 1 Step CLP, it contains corrosion inhibitors for short term storage. No need to finish with an additional protectant/lube.



1. Drape patch (centered) over spear point and push down until threads show.



2. (P1) Assemble tactical Jag to pull through cable with cleaning patch attached securely. (P2) Saturate cleaning patch with CLP/Cleaner.

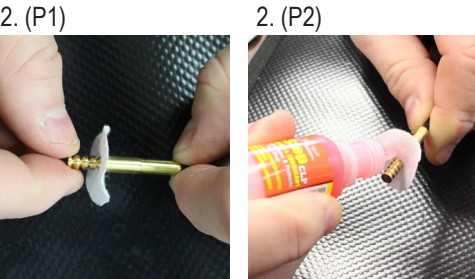

8. Check bore by using a Pro-Shot Original J Chamber Flag or XL Bore illuminator. (8-1) \*Photo of Bore Light shining through the end of the barrel.

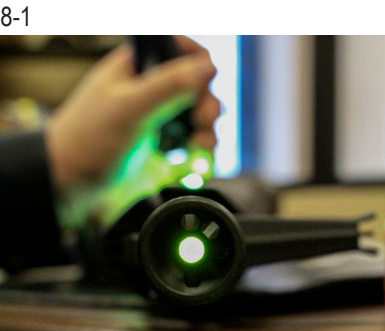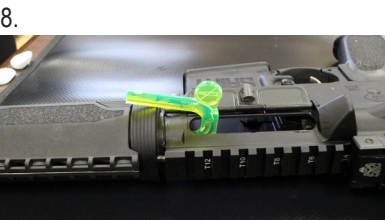


3. (P1) Insert Cable, (handle attachment end first) in the chamber (P2) until visible out muzzle end. (The same direction the bullet travels.) (P3) Attach cable through middle of handle, then move brass pin over slightly to second hole to secure handle for use.



4. Pull handle until tactical jag clears barrel. After step #4 has been completed, remove the tactical jag/patch and unsecure handle from cable.



5. (P1) Assemble bore brush and drop cable through the barrel. (P2) Attach handle and pull through barrel. Note: For Short Actions, you may need to feed the cable from the muzzle end through the chamber and then attach the bore brush.

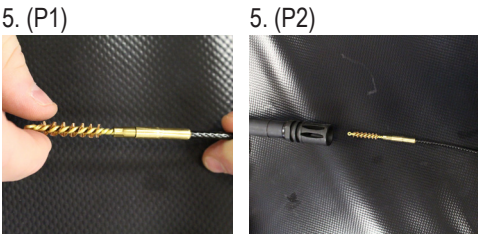

Tactical Jag/ Cleaning Patch \ Bore Brush Selection Chart			
Pistol Sizes	Tactical Jag Mfg#	Cleaning Patch Size	Tactical Brush Mfg#
9mm/.38 Cal. / .357	TJ9	2 1/4" Square	TB9
.40 Cal. / 10mm	TJ40	2 1/4" Square	TB40
.45 Cal.	TJ45	2 1/4" Square	TB45
Rifle Sizes	Tactical Jag Mfg#	Cleaning Patch Size	Tactical Brush Mfg#
5.56mm / .223 Cal.	TJ223	1" Round	TB223
6.5mm	TJ6.5mm	1" Round	TB6.5
.30 Cal. & All Variants	TJ30	1 3/4" Square	TB30
.338 Cal.	TJ338	1 3/4" Square	TB30
.50 Cal.	TJ50	2 1/2" Round	TB50
Shotgun	Tactical Jag Mfg#	Cleaning Patch Size	Tactical Brush Mfg#
12 GA	TJ12	3" Square	TB12
*All Tactical Jags and Tactical Brushes have #8-32 thread.			

## Lubrication

Lightly lubricate all surfaces that have been degreased and all moving parts. This will ensure proper functioning, help with rust prevention, and increase the firearm's life. (Do Not Over Lubricate, this can cause the action to become gummy, allowing dust and debris to collect).

Sparingly use Pro-Shot Zero-Friction High Tech Lubricant, 1 Step CLP, or Pro Gold Grease to protect all moving parts and inhibit rust.

### Temperature Operating Range:

#### Great for Extreme Weather Conditions

- Zero-Friction -75° to 450°F
- 1 Step CLP -50° to 575°F

#### Excellent for Warm Conditions

- Pro Gold Grease 32° to 450°F


## Reassemble

After reassembly, wipe down outside of metal on firearm with metal care cloth, silicone cloth, or cotton cloth with light oil.

Sold Separately Item# Metal Care Cloth (#MMC), Silicone Cloth (#SILC), and Cotton Cloths (#WIPE, TWC).

## Action Cleaning

Use a nylon or bronze bristle utility brush saturated with 1 Step CLP, Fouling Blaster, or Pro Clean Gun Cleaner #1 and scrub areas where powder residue and fouling build up (Slides, Forcing Cone, Top Strap, Ejectors, etc.) Use Pro-Shot Fouling Blaster/Pro Clean Gun cleaner for hard to reach areas of the action and trigger mechanism. (Ensure to properly lubricate after using Fouling Blaster or Pro Clean Gun Cleaner #1).

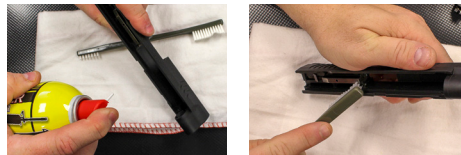

## Pull Through Tactical Jags

Pro-Shot's Exclusive Tactical Jag Design is a superior way to clean your Firearm & Easier!

Tactical Jags are for use with the Pro-Shot Tactical Pull Through Cleaning Kit System.

### How do they work?

- 1) Drape patch (centered) over spear point and push down.
- 2) Assemble jag onto cleaning system and Pull Through breech to Muzzle end.
- 3) Repeat until patches are clean.



\*\*See Reverse side for bore cleaning instructions and sizing selection chart.

## Optics Cleaning

Item# LCK-BASIC (Pictured Below), and #LCK (Optics Cleaning in Tactical Pouch)

- Remove as much dust and dirt as possible from the lens with soft bristle lens brush.
- Apply Lens Cleaning solution to the lens.
- Using a circular motion, gently remove oil, fingerprints, and grime from the lens surface, working from the center outward. When wiping, apply only enough pressure to remove smudge.
- Use cotton swabs for hard to reach areas.
- Extremely dirty lenses should be washed with soap and water and dry with microfiber lens cloth. Then apply Anti-Fog lens cleaner as protectant and dry with lens tissue.
- To remove dust only: brush lens gently with lens brush.



## Gun Safety

### Rules of Firearms



### Things to know before cleaning:

- Always check to make sure your gun is unloaded before cleaning.
- Do not have any ammunition around when cleaning.
- Inspect your gun as you clean. Check your firearms for wear and cracks when you clean. Consult a qualified gunsmith for any necessary repairs.
- Don't disassemble your gun more than necessary. Only disassemble gun to the point needed to reach areas where powder residue and fouling accumulate (bore, chamber, bolt, etc.). Refer to owners manuals for instructions.

## Recommendations

- Use a cleaning mat to save time and cleanup.
- When using Pro-Shot 1 Step CLP or Copper Solvent IV, let the cleaner set for 5-15 minutes in the bore so the penetrating agents and additives break the fouling loose.
- Pro-Shot Tactical Jag: Using a jag is the most superior way to remove fouling from your barrel with a pull through system. It gives the patch constant pressure in the bore and traps the fouling in the rings.
- For most efficient and effective bore cleaning, a new cleaning patch should be used each pass through the bore.
- For safe storage of firearm, use Original J Chamber Flag Bore Light Illuminator with safety flag inserted in chamber.



**"FIREARMS CLEANING IS OUR PASSION,  
SERVICE IS OUR SPECIALTY!"**

[www.ProShotDefense.com](http://www.ProShotDefense.com)

[www.ProShotProducts.com](http://www.ProShotProducts.com)

Email: [service@proshotproducts.com](mailto:service@proshotproducts.com)

Phone: 217-824-9133

**TACTICAL M/LE  
PULL THROUGH  
SYSTEM CLEANING  
INSTRUCTIONS**